

JUNE 2011

# Makita®

COMPLETE POWER TOOL  
CATALOGUE



**Makita®**



**maktec®**  
by Makita



# INDUSTRIAL POWER TOOLS

## ANGLE GRINDERS

### 9554HN 115mm

Compact yet powerful grinder



#### SPECIFICATIONS

Max. Capacities (dia.)	
Depressed centre wheel	115mm
Abrasive disc	115mm
Diamond wheel	115mm
No load speed	10,000 r/min
Net weight	1.8kg
Power supply cord	2.5m



### GA4530 115mm

Ergonomically designed side grip for easy handling



new

#### SPECIFICATIONS

Max. Capacities (dia.)	
Depressed centre wheel	115mm
Abrasive disc	115mm
Diamond wheel	115mm
No load speed	11,000 r/min
Net weight	1.8kg
Power supply cord	2.5m



### 9557HN 115mm

High performance motor



#### SPECIFICATIONS

Max. Capacities (dia.)	
Depressed centre wheel	115mm
Abrasive disc	115mm
Diamond wheel	115mm
No load speed	11,000 r/min
Net weight	2.0kg
Power supply cord	2.5m



### 9564H 115mm

High 1,100W power anti-dust motor



#### SPECIFICATIONS

Max. Capacities (dia.)	
Depressed centre wheel	115mm
Abrasive disc	115mm
Diamond wheel	115mm
No load speed	11,000 r/min
Net weight	1.8kg
Power supply cord	2.5m



### 9558HP 125mm

Non-locking paddle switch grinders are for use in workplaces where safety is specified, especially in the mining & petrochemical industries



#### SPECIFICATIONS

Max. Capacities (dia.)	
Depressed centre wheel	125mm
Abrasive disc	125mm
Diamond wheel	125mm
No load speed	11,000 r/min
Net weight	2.1kg
Power supply cord	2.5m



### GA5010 125mm

Slim body and high durability



#### SPECIFICATIONS

Max. Capacities (dia.)	
Depressed centre wheel	125mm
Abrasive disc	125mm
Diamond wheel	125mm
No load speed	11,000 r/min
Net weight	2.2kg
Power supply cord	2.5m



### 9565H 125mm

High 1,100W power anti-dust motor



#### SPECIFICATIONS

Max. Capacities (dia.)	
Depressed centre wheel	125mm
Abrasive disc	125mm
Diamond wheel	125mm
No load speed	11,000 r/min
Net weight	1.8kg
Power supply cord	2.5m




### 9565CV 125mm

High power motor with variable speed in small circumference barrel body



#### SPECIFICATIONS

Max. Capacities (dia.)	
Depressed centre wheel	125mm
Abrasive disc	125mm
Diamond wheel	125mm
No load speed	2,800 - 11,000 r/min
Net weight	1.8kg
Power supply cord	2.5m



### GA7010C 180mm

Extra Slim design



Compact & lightweight with high power to weight ratio for greater efficiency

#### SPECIFICATIONS

Max. Capacities (dia.)	
Depressed centre wheel	180mm
Wire cup brush	110mm
Cut-off wheel	180mm
No load speed	8,400 r/min
Net weight	3.4kg
Power supply cord	2.5m



### GA7020 180mm

Superior anti-dust structure



#### SPECIFICATIONS

Max. Capacities (dia.)	
Depressed centre wheel	180mm
Wire Cup brush	110mm
Cut-off wheel	180mm
No load speed	8,500 r/min
Net weight	4.7kg
Power supply cord	2.5m



### GA9010C 230mm

Extra Slim design



High power to weight ratio for greater efficiency

#### SPECIFICATIONS

Max. Capacities (dia.)	
Depressed centre wheel	230mm
Wire Cup brush	110mm
Cut-off wheel	230mm
No load speed	6,000 r/min
Net weight	3.4kg
Power supply cord	2.5m



### GA9050 230mm

Extra Slim design



new

Most compact in its class

#### SPECIFICATIONS

Max. Capacities (dia.)	
Depressed centre wheel	230mm
Wire Cup brush	110mm
Cut-off wheel	230mm
No load speed	6,600 r/min
Net weight	4.7kg
Power supply cord	2.5m



# ANGLE GRINDERS

## GA9020 230mm

Outstanding durability



### SPECIFICATIONS

Max. Capacities (dia.)	230mm
Depressed centre wheel	110mm
Wire Cup brush	230mm
Cut-off wheel	230mm
No load speed	6,600 r/min
Net weight	4.7kg
Power supply cord	2.5m



## GA9020K 230mm

Gear housing can be positioned at every 90°, as with GA9020



### SPECIFICATIONS

Max. Capacities (dia.)	230mm
Depressed centre wheel	110mm
Wire Cup brush	230mm
Cut-off wheel	230mm
No load speed	6,600 r/min
Net weight	4.7kg
Power supply cord	2.5m



## GA9040SK01 230mm

Heavy duty motor with outstanding durability



Rotatable rear handle

### SPECIFICATIONS

Max. Capacities (dia.)	230mm
Depressed centre wheel	110mm
Wire cup brush	230mm
Cut-off wheel	230mm
No load speed	6,600 r/min
Net weight	5.5kg
Power supply cord	2.5m



\* Although Angle Grinders are portrayed with a grinding disc, 180mm & 230mm grinders are sold without grinding discs.



# BENCH GRINDER

## GB0602 150mm with WA60 & GC120 grinding wheels



### SPECIFICATIONS

Max. wheel size	150x16mm
Grinding wheel	150WA60, 150GC120
Hole diameter	12.7mm
No load speed	2,850r/min
Net Weight	9.2kg



# BELT SANDERS

## 9032 9mm (6 or 13mm optional)

Maximum sanding depth 110mm



### SPECIFICATIONS

Belt size	9mm x 533mm
Belt speed	300 - 1,700m/min
Max. sanding depth	110mm
Net weight	1.5kg
Power supply cord	2.5m



## 9031 30mm


Optimum use in close quarters or for irregular shapes.

Ideal for glass



### SPECIFICATIONS

Belt size	30mm x 533mm
Belt speed	200 - 1,000m/min
Net weight	2.1kg
Power supply cord	2.5m



## 9903 76mm

Features auto-tracking belt system



### SPECIFICATIONS

Belt size	76mm x 533mm
Belt speed	210-440m/min
Net weight	4.3kg
Power supply cord	5m




## 9401 100mm

Perfect for flush along side sanding



### SPECIFICATIONS

Belt size	100mm x 610mm
Belt speed	350m/min
Net weight	7.3kg
Power supply cord	5m



## 9403 100mm

Powerful motor for high production use



### SPECIFICATIONS

Belt size	100mm x 610mm
Belt speed	500m/min
Net weight	5.9kg
Power supply cord	5m



# BLOWERS

## UB1100 (Without dust bag)

Powerful Motor



AC304

600W

### SPECIFICATIONS

Air volume	2.8m <sup>3</sup> /min.
Air pressure	5.5kpa
No load speed	16,000r/min
Net weight	1.75kg
Power supply cord	2.5m



## UB1101 (Variable speed with dust bag)

### SPECIFICATIONS

Air volume	2.8m <sup>3</sup> /min
Air pressure	0 - 5.5kpa
No load speed	0 - 16,000r/min
Net weight	1.75kg
Power supply cord	2.5m



AC304

600W

# DUST COLLECTOR

## M440 Wet & Dry Vacuum Cleaner

Can be used in conjunction with power tools up to 2000W. Activated immediately power tool is turned on.

### SPECIFICATIONS

Max. peak air flow	3,0m <sup>3</sup> /min
Max. sealed suction	21,5 kpa
Max. Power tool wattage	2,000W
Recoverable capacity	
Dust	35L
Water	17L
Net weight	8.0kg

Standard Equipment : 2 flexible hoses, extension tubes, corner nozzle, crevice nozzle brushes for floors, brushes for liquids.



1,000W

# HEAT GUN

## HG551VK

Temperature controlled by potentiometer.



new

### SPECIFICATIONS

Air temperature	100°C-550°C
Air flow	200-500 l/min
Net weight	0.7kg

1,800W

# BISCUIT JOINER

## 3901

Designed for quickly making strong plate joints



### SPECIFICATIONS

Blade diameter	100mm
Max. Cutting depth	20mm
No load speed	11,000r/min
Net weight	2.8kg
Power supply cord	2.5m



AC410

590W

# BRAD NAILERS

## AF505 18 Gauge Pneumatic Brad Nailer



### SPECIFICATIONS

Nail size	15mm-50mm
Gauge	18 Ga
Capacity	100 pcs
Operating air pressure	60 - 115 PSI
Net weight	1.4kg

## AF600 16 Gauge Pneumatic Brad Nailer



### SPECIFICATIONS

Capacity	20mm-64mm
Length	16Ga
Gauge	100pcs
Magazine capacity	72.6-116 PSIG
Operating air pressure	1.6kg
Net weight	

# CIRCULAR SAWS WOOD / ALUMINIUM CUTTING

Easy pocket cuts for sinks & hobs.



## Clean Cutting

- Splinter-free cutting

Plunge Cut Circular Saw 165mm SP6000K

## SP6000K 165mm Plunge Cut Circular Saw

High accuracy clean cutting  
Includes 1.4m rail

### SPECIFICATIONS

Blade diameter	165mm
Bore size	20mm
Max. Cutting capacity	
At 90°	56mm
At 45°	40mm
At 48°	38mm
No load speed	2,000-5,200r/min
Net weight	4.1kg
Power supply cord	2.5m



AC304

1,300W

# CIRCULAR SAWS

## WOOD CUTTING

**5704RK** 190mm  
with TCT blade

Low noise and  
vibration sawing for  
operator comfort



### SPECIFICATIONS

Blade diameter	190mm
Bore size	30mm
Max. Cutting capacity	
At 90°	66mm
At 45°	46mm
No load speed	4,900r/min
Net weight	4.6kg
Power supply cord	2.5m



## WOOD CUTTING

**N5900B** 235mm  
with TCT blade

A hardworking saw  
with the power  
to rip through  
most materials



### SPECIFICATIONS

Blade diameter	235mm
Bore size	25mm
Max. Cutting capacity	
At 90°	85mm
At 45°	60mm
At 50°	53mm
No load speed	4,100r/min
Net weight	7.0kg
Power supply cord	2.5m



## WOOD CUTTING

**5903RK** 235mm  
with TCT blade

For all-round  
easier operation



### SPECIFICATIONS

Blade diameter	235mm
Bore size	30mm
Max. Cutting capacity	
At 90°	85mm
At 45°	64mm
No load speed	4,500r/min
Net weight	7.6kg
Power supply cord	2.5m



## WOOD CUTTING

**5143R** 355mm  
with TCT blade

Designed for  
all-round  
easier operation



### SPECIFICATIONS

Blade diameter	355mm
Bore size	30mm
Max. Cutting capacity	
At 90°	130mm
At 45°	90mm
No load speed	2,700r/min
Net weight	14.5kg
Power supply cord	5m



## METAL CUTTING

**4131** 185mm  
with TCT blade  
for mild steel

"Cold" cutting  
prevents distortion  
of material.



### SPECIFICATIONS

Blade diameter	185mm
Bore size	30mm
Max. Cutting capacity	63mm
No load speed	3,500r/min
Net weight	4.8kg
Power supply cord	2.5m



# CUT-OFF SAWS

## METAL CUTTING

**2414NB** 355mm  
with abrasive wheel

D-Shape handle  
for easy gripping.



### SPECIFICATIONS

Wheel diameter	355mm
Hole diameter	25.4mm
No load speed	3,800r/min
Net weight	16.2kg
Power supply cord	2.5m

## COLD METAL CUTTING

**LC1230** 305mm  
with TCT blade for mild steel

"Cold" cutting for extra safety  
and burr-free cuts.



### SPECIFICATIONS

Blade diameter	305mm
Bore size	25.4mm
Max. Cutting capacity	
At 90°	115mm
At 45°	75mm x 150mm
	90mm
	85mm x 85mm
Net weight	19kg
Power supply cord	2.5m

# MITRE SAWS

## WOOD / ALUMINIUM CUTTING

### LS0714 190mm Double Slide Compound Mitre Saw with TCT wood cutting blade

Maximum cutting width 300mm



#### SPECIFICATIONS

Blade diameter	190mm
Bore size	20mm
Max. Cutting capacity	
At 90°	52mm x 300mm
At 45°	52mm x 212mm
No load speed	6,000r/min
Net weight	12.5kg
Power supply cord	2.5m




### LS1040 255mm Compound Mitre Saw with TCT wood cutting blade

Clean mitre cutting  
up to 45°, left or right



#### SPECIFICATIONS

Blade diameter	255mm - 260mm
Bore size	25.4mm
Max. Cutting capacity with 255mm blade	
At 90°	90.5mm x 95mm
At 45°	90.5mm x 67mm
No load speed	4,600r/min
Net weight	11.6kg
Power supply cord	2.5m




### LS1018L 255mm Double Slide Compound Mitre Saw with TCT wood cutting blade

Ergonomically designed  
rubberized soft grip  
provides more control  
comfort



#### SPECIFICATIONS

Blade diameter	255-260mm
Bore size	25.4mm
Max. Cutting capacity with 255mm blade	
At 90°	91mm x 305mm
At 45°	91mm x 215mm
No load speed	4,300r/min
Net weight	19.9kg
Power supply cord	2.5m



### LS1216L 305mm Double Slide Compound Mitre Saw with TCT wood cutting blade


Large cutting capacity

**DXT**  
Deep and Exact Cutting Technology



#### SPECIFICATIONS

Blade diameter	305mm
Bore size	25.4mm
Max. Cutting capacity with 305mm blade	
At 90°	107mm x 363mm
At 45°	107mm x 255mm
No load speed	3,200r/min
Net weight	26.6kg
Power supply cord	2.5m



## MITRE / TABLE SAW

### LF1000 260mm Flip-Over Saw

Compact fold away legs allow  
easy transport to job site.



#### SPECIFICATIONS

Blade diameter	260mm
Bore size	30mm
Max. Cutting capacity	
At 90° Table	70mm
Mitre	68mm x 155mm
At 45° Table	32mm
Mitre	68 x 95mm
Bevel	50 x 140mm
No load speed	2,700r/min
Net weight	32kg
Power supply cord	2.5m



## TABLE SAW

### MLT100 255mm Table Saw

Provided with sliding  
left extension sub-table.



Optional WST03 Stand  
for MLT100 Table Saw



#### SPECIFICATIONS

Blade diameter	255mm
Bore size	25.4mm
Max. Cutting capacity	
At 90°	90.5mm
At 45°	63mm
No load speed	4 300r/min
Net weight	34.8kg
Power supply cord	2.5m
Carbon Brush	JM23000123



# DIAMOND CORE DRILLS

## 8406 13mm Gear Chuck Diamond Core Hammer Drill

Fast drilling in ferro concrete or brick



### SPECIFICATIONS

Drilling capacities  
Concrete (with diamond core bit dry) 152mm  
(with diamond core bit wet) 60mm  
Steel 13mm  
Wood 30mm  
No load speed 0 - 1,500r/min  
Blows per minute 0 - 22,500  
Net weight 3.3kg  
Power supply cord 2.5m



## DBM131 Diamond Core Drill

Heavy duty, powerful 2-speed wet & dry diamond core drill.



### SPECIFICATIONS

Drilling capacities  
Concrete - low speed (with diamond core bit) 132mm  
Concrete - high speed (with diamond core bit) 70mm  
No load speed Hi: 0 - 1,570r/min  
Lo: 0-800r/min  
Net weight 6.1kg  
Power supply cord 2.5m  
Carbon brush EE80700019 (Sold per each)



**DBM131** Diamond Core Drill can be supplied with optional stand for use when drilling any hole over 70mm diameter



## DBM230 Diamond Core Drill

Heavy duty, 3-speed diamond core drill with powerful motor for wet drilling.



### SPECIFICATIONS

Drilling capacities  
Concrete block (with diamond core bit)  
Low: 230mm  
Med: 100mm  
Hi: 60mm  
No load speed Low: 390r/min  
Med: 1,040r/min  
Hi: 1,700r/min  
Net weight 12.4kg  
Power supply cord 2.5m  
Carbon brush EE80700019 (Sold per each)



**DBM230** Diamond Core Drill must be supplied with optional stand for use with all holes drilled. The DBM230 is not a handheld machine.



\* Although Diamond Core Drills are portrayed with a diamond core bit, they are sold without diamond core bits.

# DIAMOND SAWS

## SG1250


125mm Double Blade Double Blade Included



Clean, compact & comfortable

### SPECIFICATIONS

Blade diameter 125mm  
Bore size 22.23mm  
Cutting depth 0 - 30mm  
Possible adjustment of cutting width 6 - 30mm  
No load speed 9,000r/min  
Net weight 4.1kg  
Power supply cord 5m



## WET CUTTING

**4107R** 180mm without blade

Quick and clean cutting



### SPECIFICATIONS

Blade diameter 180mm  
Max. Cutting capacity 60mm  
No load speed 5,000r/min  
Net weight 7.2kg  
Power supply cord 5m



## DRY CUTTING

**4157KB** 180mm Dustless Cutter without blade

Large transparent dust collection container efficiently captures waste for a cleaner work environment.



### SPECIFICATIONS

Blade diameter 180mm  
Bore size 22.23mm  
Max. Cutting capacity At 90° 58mm  
At 45° 29mm  
No load speed 5,800r/min  
Net weight 5.5kg  
Power supply cord 4m



## DRY CUTTING

**4114S** 355mm Electric Power Cutter without blade

Effective alternative to a petrol power cutter



### SPECIFICATIONS

Blade diameter 355mm  
Bore size 25.4mm  
Max. Cutting capacity 125mm  
No load speed 3,500r/min  
Net weight 10.9kg  
Power supply cord 2.5m



# DIE GRINDERS

**GD0600** 6.0mm

Small circumference housing for easy handling.



### SPECIFICATIONS

Collet capacity 6.0mm  
No load speed 25,000r/min  
Net weight 1.6kg  
Power supply cord 2.5m



## HIGH SPEED

**GD0800C** 6.35mm



### SPECIFICATIONS

Collet capacity 6.35mm  
Optional collet (6mm or 8mm)  
Max. bit dia. 25mm  
No load speed 7,000 - 28,000r/min  
Net weight 1.6kg  
Power supply cord 2.5m



## LOW SPEED

**GD0810C** 6.35mm

With high torque, ideal for grinding internal surfaces removing paint etc. using flap wheel discs



### SPECIFICATIONS

Collet capacity 6.35mm  
Optional collet (6mm or 8mm)  
Max. bit dia. 50mm  
No load speed 1,800 - 7,000r/min  
Net weight 1.7kg  
Power supply cord 2.5m



\* Although Die Grinders are portrayed with a wheel point they are sold without wheel points or flapper wheels.

# DRILLS - ROTARY (NON-HAMMER)

## 6501 6.5mm Gear chuck

Ideal for high speed drilling into thin material i.e. pop riveting applications or pilot holes in wood.



### SPECIFICATIONS

Drilling capacity	
Steel	6.5mm
Wood	9mm
No load speed	4,500r/min
Net weight	0.9kg
Power supply cord	2m



## 6411 10mm Gear Chuck

Compact & lightweight yet powerful



### SPECIFICATIONS

Drilling capacity	
Steel	10mm
Wood	25mm
No load speed	3,000r/min
Net weight	1.2kg
Power supply cord	2m



## DA3010F 10mm Gear Chuck

Ideal for close quarter drilling - 66mm head height.



### SPECIFICATIONS

Drilling capacity	
Steel	10mm
Wood	25mm
No load speed	0 - 2,400r/min
Net weight	1.4kg
Power supply cord	2.5m



## 6408 10mm Keyless Chuck

Variable speed for drilling in a variety of materials.



### SPECIFICATIONS

Drilling capacity	
Steel	10mm
Wood	25mm
No load speed	0 - 2,500r/min
Net weight	1.4kg
Power supply cord	2.5m



## 6013BR 13mm Gear Chuck

Double gear reduction for added torque



### SPECIFICATIONS

Drilling capacity	
Steel	13mm
Wood	36mm
No load speed	550r/min
Net weight	2.8kg
Power supply cord	2.5m



## 6300-4 16mm Gear Chuck

4-speed (500 / 600 / 1,100 / 1,300 r/min) for drilling a variety of materials



### SPECIFICATIONS

Drilling capacity	
Steel	16mm
Wood	30mm
No load speed	500 / 600 / 1,100 / 1,300r/min
Net weight	3.2kg
Power supply cord	2.5m



## DP4002 13mm Gear Chuck

Extra powerful motor provides the highest torque in its class.



### SPECIFICATIONS

Drilling capacity	
Steel	13mm
Wood	38mm
No load speed	0 - 600r/min
Net weight	2.2kg
Power supply cord	2.5m



# IMPACT DRILLS (WITH HAMMER ACTION)

## HP1230 10mm Gear Chuck

High quality aluminium gear housing provides and toughness



### SPECIFICATIONS

Drilling capacities	
Concrete	12mm
Steel	10mm
Wood	15mm
No load speed	0 - 2,900r/min
Blows per minute	0 - 31,900
Net weight	1.4kg
Power supply cord	2m



## HP1640 13mm Gear Chuck

Dual purpose for "rotation only" or "rotation with hammering"



### SPECIFICATIONS

Drilling capacities	
Concrete	16mm
Steel	13mm
Wood	30mm
No load speed	0 - 2,800r/min
Blows per minute	0 - 44,800
Net weight	1.8kg
Power supply cord	2m



## HP1630 13mm Gear Chuck

High power motor



### SPECIFICATIONS

Drilling capacities	
Concrete	16mm
Steel	13mm
Wood	30mm
No load speed	0 - 3,200r/min
Blows per minute	0 - 48,000
Net weight	1.9kg
Power supply cord	2m





# IMPACT DRILLS (WITH HAMMER ACTION)

## HP2050 13mm Gear Chuck

2-Speed, Var & Rev

Compact body with durable metal gear housing

### SPECIFICATIONS

Drilling capacities	20mm
Concrete	Hi: 8mm Lo: 13mm
Steel	Hi: 25mm Lo: 40mm
Wood	Hi: 0 - 2,900r/min
No load speed	Lo: 0 - 1,200r/min
Blows per minute	Hi: 0 - 58,000
	Lo: 0 - 24,000
Net weight	2.3kg
Power supply cord	2.5m



## HP2051 13mm Keyless Chuck

2-Speed, Var & Rev

Slender & compact body with durable metal gear housing

### SPECIFICATIONS

Drilling capacities	20mm
Concrete	Hi: 8mm Lo: 13mm
Steel	Hi: 25mm Lo: 40mm
Wood	Hi: 0 - 2,900r/min
No load speed	Lo: 0 - 1,200r/min
Blows per minute	Hi: 0 - 58,000
	Lo: 0 - 24,000
Net weight	2.3kg
Power supply cord	2.5m



## HP2010N 13mm Gear Chuck

Extra Heavy Duty Variable Speed R&L 2-Speed

Industrial metal gear housing for long lasting durability

### SPECIFICATIONS

Drilling capacities	20mm
Concrete	13mm
Steel	40mm
Wood	Hi: 0 - 2,300r/min
No load speed	Lo: 0 - 900r/min
Blows per minute	Hi: 0 - 46,000
	Lo: 0 - 18,000
Net weight	3kg
Power supply cord	2.5m



## HP2020 13mm Gear Chuck

Extra Heavy Duty 2-Speed

For fast and steady drilling

### SPECIFICATIONS

Drilling capacities	20mm
Concrete	13mm
Steel	40mm
Wood	Hi: 2,300r/min
No load speed	Lo: 900r/min
Blows per minute	Hi: 46,000
	Lo: 18,000
Net weight	3kg
Power supply cord	2.5m



## HP2070 13mm Gear Chuck

Heavy Duty Variable Speed R&L 2-Speed

Power in a slender & compact body

### SPECIFICATIONS


Drilling capacities	20mm
Concrete	Hi: 8mm Lo: 16mm
Steel	Hi: 25mm Lo: 40mm
Wood	Hi: 0 - 2,900r/min
No load speed	Lo: 0 - 1,200r/min
Blows per minute	Hi: 0 - 58,000
	Lo: 0 - 24,000
Net weight	2.4kg
Power supply cord	2.5m



# JIG & RECIPRO SAWS

## 4329K

Medium duty model with 450W continuous input




### SPECIFICATIONS

Length of stroke	18mm
Max. Cutting capacities	
In wood at 90°	65mm
In steel at 90°	6mm
Strokes per minute	500-3,100
Net weight	1.9kg
Power supply cord	2.0m

## 4350FCT

Toolless blade change system




### SPECIFICATIONS

Length of stroke	26mm
Max. Cutting capacities	
In wood at 90°	135mm
In steel at 90°	10mm
Strokes per minute	800 - 2,800
Net weight	2.5kg
Power supply cord	2.5m

## 4351FCT

With electronic speed control and speed dial



### SPECIFICATIONS

Length of stroke	26mm
Max. Cutting capacities	
In wood at 90°	135mm
In steel at 90°	10mm
Strokes per minute	800 - 2,800
Net weight	2.5kg
Power supply cord	2.5m



## JR3070CT Recipro Saw, Orbital

Extra-low vibration and extra power

AVT



### SPECIFICATIONS

Max. Cutting capacities	
In pipe	130mm
In wood	255mm
Length of stroke	32mm
Strokes per minute	0 - 2,800
Net weight	4.4kg
Power supply cord	2.5m

# METAL WORKING TOOLS



**JN1601 1.6mm**

Precise, burr-free curved and straight cuts.



**SPECIFICATIONS**

Max. Cutting capacities	
Mild Steel up to 400 N/mm <sup>2</sup>	1.6mm
Stainless Steel up to 600 N/mm <sup>2</sup>	1.2mm
Aluminium up to 200 N/mm <sup>2</sup>	2.5mm
Minimum cutting radius	
Outside edge	50mm
Inside edge	45mm
Strokes per minute	2,200
Net weight	1.6kg
Power supply cord	2m



550W

# NIBBLERS

**JN3200 3.2mm**

Zips through sheet metal, plastics and other sheet materials.



**SPECIFICATIONS**

Max. Cutting capacities	
Mild Steel up to 400 N/mm <sup>2</sup>	3.2mm
Stainless Steel up to 600 N/mm <sup>2</sup>	2.5mm
Aluminium up to 200 N/mm <sup>2</sup>	3.5mm
Minimum cutting radius	
Outside edge	128mm
Inside edge	120mm
Strokes per minute	1,300
Net weight	3.4kg
Power supply cord	2.5m



660W

**JS1660 1.6mm**

**Straight Shear**

Narrow contact slide blade allows cleaner cuts without damaging material.



**SPECIFICATIONS**

Max. Cutting capacities	
Mild Steel up to 400 N/mm <sup>2</sup>	1.6mm
Stainless Steel up to 600 N/mm <sup>2</sup>	1.2mm
Aluminium up to 200 N/mm <sup>2</sup>	2.5mm
Strokes per minute	4,500
Net weight	1.4kg
Power supply cord	2.5m



260W

# SHEARS

**JS1600 1.6mm**

Blade design results in no material loss.



**SPECIFICATIONS**

Max. Cutting capacities	
Mild Steel up to 400 N/mm <sup>2</sup>	1.6mm
Stainless Steel up to 600 N/mm <sup>2</sup>	1.2mm
Aluminium up to 200 N/mm <sup>2</sup>	2.5mm
Minimum cutting radius	30mm
Strokes per minute	4,000
Net weight	1.7kg
Power supply cord	2m



300W

**JS3200 3.2mm**

Powerful motor for heavy-duty cutting in mild steel and stainless steel.



**SPECIFICATIONS**

Max. Cutting capacities	
Mild Steel up to 400 N/mm <sup>2</sup>	3.2mm
Stainless Steel up to 600 N/mm <sup>2</sup>	2.5mm
Aluminium up to 200 N/mm <sup>2</sup>	4.0mm
Minimum cutting radius	50mm
Strokes per minute	1,600
Net weight	3.4kg
Power supply cord	2.5m



660W

# ORBITAL & RANDOM SANDERS

**BO4555 1/4 Sheet**

Powerful motor with low vibration & low noise



**SPECIFICATIONS**

Pad size	112mm x 102mm
Abrasive paper size	114mm x 140mm
Orbits per minute	14,000
Net weight	1.1kg
Power supply cord	2m



200W



**BO3710 1/3 Sheet**

Ergonomic tool body provides sure grip and easy handling



**SPECIFICATIONS**

Pad size	93mm x 185mm
Abrasive paper size	93mm x 228mm
Orbits per minute	11,000
Net weight	1.5kg
Power supply cord	2m



190W

**BO4900 1/2 Sheet**

Minimized vibration for reduced operator fatigue



**SPECIFICATIONS**

Pad size	115mm x 229mm
Abrasive paper size	115mm x 232mm
Orbits per minute	10,000
Net weight	2.8kg
Power supply cord	2.5m



330W

**9046 1/2 Sheet**

Powerful performance for pro's needs



**SPECIFICATIONS**

Pad size	115mm x 229mm
Abrasive paper size	115mm x 280mm
Orbits per minute	6,000
Net weight	3.0kg
Power supply cord	2.5m



600W

**BO5031 125mm**

Powerful motor and high durability



**SPECIFICATIONS**

Pad diameter	123mm
Abrasive disc diameter	125mm
Orbits per minute	4,000 - 12,000
Net weight	1.3kg
Power supply cord	2.0m



300W

# ORBITAL & RANDOM SANDERS

## BO6030 150mm

Exceptionally low vibration, yet aggressive sanding.



### SPECIFICATIONS

Pad diameter	150mm
Abrasive disc diameter	150mm
Orbits per minute	4,000 - 10,000
Orbit diameter	3mm
Net weight	2.3kg
Power supply cord	2.5m



## BO6040 150mm

For stock removal & finishing.



### SPECIFICATIONS

Pad diameter	150mm
Abrasive disc diameter	150mm
Orbits per minute	1,600 - 5,800
Orbit diameter	5.5mm
Net weight	2.7kg
Power supply cord	2.5m



# PLANERS & THICKNESSER

## KP0800K 82mm

New aesthetic design incorporating safety foot


Reversible mini TCT blades.

**new**



### SPECIFICATIONS

Planing width	82mm
Max Planing depth	2.5mm
No load speed	17,000r/min
Net weight	2.6kg
Power supply cord	2.5m



## KP0810K 82mm


Lightweight design for easy handling

Reversible mini TCT blades.



### SPECIFICATIONS

Planing width	82mm
Max Planing depth	4mm
No load speed	16,000r/min
Net weight	3.2kg
Power supply cord	2.5m



## 1100 82mm


Field proven reliable performance

Reversible mini TCT blades.



### SPECIFICATIONS

Planing width	82mm
Max Planing depth	3mm
No load speed	16,000r/min
Net weight	5.1kg
Power supply cord	2.5m




## 2012NB 304mm Thicknesser

- Compact and lightweight (27kg) for easier transportation.
- Unique feeding mechanism assures smoother finish with minimal snipe on stock
- 4-Post design and diagonal cross supports for stability.
- Easy TCT blade change.



### SPECIFICATIONS

Cutting width in Pine	304mm
Cutting depth in Pine	3mm of stock width less than 150mm 1.5mm of stock width from 150mm to 240mm
Feed rate per minute	8.5m
Table size (W x L)	304 x 771mm
No load speed	8,500r/min
Net weight	27kg
Power supply cord	2.5m



# ROTARY HAMMERS

## HR2230 22mm 2.3 Joules 2 Operation modes

Highly durable mechanical parts, motor and carbon brushes



### SPECIFICATIONS - SDS+

Capacities			
Concrete	22mm		
Steel	13mm		
Wood	32mm		
No load speed	0 - 1050r/min		
Blows per minute	0 - 4,050		
Net weight	2.4kg		
Power supply cord	2.5m		

CB325 **710W**



## HR2460 24mm 2.7 Joules 2 Operation modes

Same speed & torque in forward & reverse rotation



### SPECIFICATIONS - SDS+

Capacities			
Concrete	24mm		
Steel	13mm		
Wood	32mm		
No load speed	0 - 1,100r/min		
Blows per minute	0 - 4,500		
Net weight	2.5kg		
Power supply cord	2.5m		

CB325 **780W**

## HR2470 24mm 2.7 Joules 3 Operation modes

One-touch sliding chuck for easy bit change



### SPECIFICATIONS - SDS+

Capacities			
Concrete	24mm		
Steel	13mm		
Wood	32mm		
No load speed	0 - 1,100r/min		
Blows per minute	0 - 4,500		
Net weight	2.6kg		
Power supply cord	2.5m		

CB325 **780W**

## HR2475 24mm 2.7 Joules 3 Operation modes

Spade handle design for heavy duty applications.



**new**

### SPECIFICATIONS - SDS+

Capacities			
Concrete	24mm		
Steel	13mm		
Wood	32mm		
No load speed	0 - 1,100r/min		
Blows per minute	0 - 4,500		
Net weight	3.0kg		
Power supply cord	4m		

CB419 **780W**



## HR2470T 24mm 2.7 Joules 3 Operation modes

Quick change drill chuck.



### SPECIFICATIONS - SDS+

Capacities			
Concrete	24mm		
Steel	13mm		
Wood	32mm		
No load speed	0 - 1,100r/min		
Blows per minute	0 - 4,500		
Net weight	2.8kg		
Power supply cord	2.5m		

CB325 **780W**



## HR2810 28mm 2.9 Joules 3 Operation modes

Most efficient in its class for both drilling & chipping

### SPECIFICATIONS - SDS+

Capacities			
Concrete (with diamond core bit)	80mm		
Concrete (with TCT bit)	28mm		
Steel	13mm		
Wood	32mm		
No load speed	0 - 1,100r/min		
Blows per minute	0 - 4,500		
Net weight	3.3kg		
Power supply cord	2.5m		

CB325 **800W**



## HR3200C 32mm 5.5 Joules 3 Operation modes

Lightweight design featuring low vibration levels

**new**

### SPECIFICATIONS - SDS+

Capacities			
Concrete (with TCT bit)	32mm		
Concrete (with diamond core)	90mm		
Steel	13mm		
Wood	32mm		
No load speed	315-630r/min		
Impacts per minute	1,650-3,300		
Net weight	4.4kg		
Power supply cord	5m		

CB350 **850W**



## HR4002 40mm 6.2 Joules 2 Operation Modes : Hammering with rotation (for drilling) Hammering only (for chipping & breaking)

**new**

High speed for high work efficiency

### SPECIFICATIONS - SDS Max

Concrete (with TCT bit)	40mm		
Concrete (with Core bit)	105mm		
No load speed	680r/min		
Blows per minute	2,500		
Net weight	6.2kg		
Power supply cord	5m		

CB350 **1,050W**



## HR5211C 52mm 19.7 Joules 2 Operation Modes : Hammering with rotation (for drilling) Hammering only (for chipping & breaking)

High performance and low vibration

### SPECIFICATIONS - SDS Max

Max. bit dia.	52mm		
Max. core bit dia.	160mm		
No load speed	130-260r/min		
Blows per minute	1,075-2,150		
Net weight	11.6kg		
Power supply cord	5m		

CB171 **1,500W**



12

2 Operation Modes : Hammering with rotation & rotation only.  
3 Operation Modes : Hammering, hammering with rotation & rotation only.

\* Although Rotary Hammers are portrayed with a bit they are all sold without bits.

# BREAKERS & DEMOLITION HAMMERS

**HM0860C** 12 Joules  
Light Chipper



Powerful 1,100W in compact and lightweight (4.7kg) body.

**SPECIFICATIONS**

SDS Max Shank  
Blows per minute 1,100 - 2,650  
Net weight 4.7kg  
Power supply cord 5m



**HM1203C** 25.5 Joules  
Demolition Hammer



High durability and excellent demolition performance

**SPECIFICATIONS -**

SDS Max Shank  
Blows per minute 950 - 1,900  
Net weight 9.7kg  
Power supply cord 5m



**HM1801** 63 Joules  
Electric Breaker (without AVT)  
Highest-in-class demolition efficiency.



**SPECIFICATIONS**

28.6mm Hex Shank  
Blows per minute 1,100  
Net weight 30kg  
Power supply cord 5m

**HM1307C** 33.8 Joules  
Demolition Hammer

Durable, lightweight moulded carry case with wheels



Highly maneuverable and durable for excellent demolition performance



**SPECIFICATION**

30mm Hex Shank  
Blows per minute 730 - 1,450  
Net weight 15.3kg  
Power supply cord 5m



**HM1810** 63 Joules  
Electric Breaker (with AVT)  
Offers lowest vibration and highest demolition efficiency in its class.

**SPECIFICATIONS**

28.6mm Hex Shank  
Blows per minute 1,100  
Net weight 32kg  
Power supply cord 5m



\* Although Breakers and Demolition Hammers are portrayed with a bit they are all sold without bits.

## ROUTERS

**RP0900**  
6.35mm

Highly durable and well designed



**SPECIFICATIONS**

Collet capacity 6.35mm  
No load speed 27,000r/min  
Plunge capacity 0-35mm  
Net weight 2.7kg  
Power supply cord 2.5m



**RP1110C**  
6.35mm Electronic

Powerful motor delivers smooth routing



**SPECIFICATIONS**

Collet capacity 6.35mm  
No load speed 8,000 - 24,000r/min  
Plunge capacity 0 - 57mm  
Net weight 3.4kg  
Power supply cord 4m



**RP1800X**  
12.7mm

Ergonomically contoured handles for comfortable operation.



**SPECIFICATIONS**

Collet capacity 12.7mm  
No load speed 22,000r/min  
Plunge capacity 0-70mm  
Net weight 6.0kg  
Power supply cord 2.5m



**RP2301FCX**  
12.7mm

Linear ball bearing for super-smooth plunge action.



**SPECIFICATIONS**

Collet capacity 12.7mm  
No load speed 9,000 - 22,000r/min  
Plunge capacity 0 - 70mm  
Net weight 6.1kg  
Power supply cord 2.5m



## TRIMMER

**3710** 6.35mm  
Laminate Trimmer with tilt base

Smooth precision depth adjustment with rack and pinion mechanism.



**SPECIFICATIONS**

Collet capacity 6.35mm  
No load speed 30,000r/min  
Base tilt 0 - 45°  
Net weight 1.6kg  
Power supply cord 2.5m



# POLISHERS & SANDERS

## 9218PBL 180mm Polisher

Better polishing action  
for a wide variety  
of applications



### SPECIFICATIONS

Maximum capacities (dia.)  
Wool Pad 180mm  
No load speed 1,400r/min  
Net weight 2.9kg  
Power supply cord 2.5m



860W

## 9227CB 180mm Sander-Polisher

Electronic speed  
control for constant  
speed under load



### SPECIFICATIONS

Maximum capacities (dia.)  
Abrasive disc 180mm  
Wool Pad 180mm  
No load speed 0 - 3,000r/min  
Net weight 3kg  
Power supply cord 2.5m



1,200W



# SCREWDRIVERS

## FS2300 For Timber Struts

new



### SPECIFICATIONS

Capacities  
Drywall screw 5mm  
Self drilling screw 6mm  
Driving shank 6,35mm hex  
No load speed 0 - 2,500 r/min  
Net weight 1.6kg  
Power supply cord 2.5m



CB419

570W



# DRYWALL SCREWDRIVERS

Feature "Sure Lock" adjustable depth locator  
for easy and consistent screw depth setting.

## FS4300 For Aluminium Struts

new



### SPECIFICATIONS

Capacities  
Drywall screw 5mm  
Self drilling screw 6mm  
Driving shank 6,35mm hex  
No load speed 0 - 4,000r/min  
Net weight 1.4kg  
Power supply cord 2.5m



CB419

570W

## FS6300 For Steel Struts

new



### SPECIFICATIONS

Capacities  
Drywall screw 4mm  
Driving shank 6,35mm hex  
No load speed 0 - 6,000r/min  
Net weight 1.4kg  
Power supply cord 2.5m



CB419

570W

## FS2500 Tekes and Roofing

new

One touch locator



### SPECIFICATIONS

Capacities  
Drywall screw 5mm  
Self drilling screw 6mm  
Driving shank 6,35mm hex  
No load speed 0 - 2,500r/min  
Net weight 1.5kg  
Power supply cord 2.5m



CB419

570W



## FS2700 Combination (Clutch Type)

6-Stage torque adjustment



### SPECIFICATIONS

Capacities  
Hex screw 6mm  
Drywall screw 6mm  
Self drilling screw 6mm  
No load speed 0 - 2,500r/min  
Net weight 1.8kg  
Power supply cord 2.5m



CB419

570W

## 6807 2-Speed For Industrial Roofing Applications

new



### SPECIFICATIONS

Capacities  
Drywall screw 5mm  
Self drilling screw 8mm  
Driving shank 6,35mm hex  
No load speed  
Hi : 0 - 2,200r/min  
Lo : 0 - 1,000r/min  
Net weight 2kg  
Power supply cord 2.5m



CB419

500W



# IMPACT WRENCHES

**TW0200** 12.7mm  
200Nm

Aluminium hammer case with high durability

### SPECIFICATIONS

Capacities	
Standard bolt	M10-M16
High tensile bolt	M10-M12
Square drive	12.7mm
Impacts per minute	0 - 2,200
No load speed	0- 2,200 r/min
Max fastening torque	200Nm
Net weight	2.1kg
Power supply cord	2.5m



**TW0350** 12.7mm  
350Nm

Incredibly high torque of 350N.m

### SPECIFICATIONS

Capacities	
Standard bolt	M12-M22
High tensile bolt	M12-M16
Square drive	12.7mm
Impacts per minute	2,000
No load speed	2,000r/min
Max. Fastening torque	350Nm
Net weight	2.9kg
Power supply cord	2.5m



**6906** 19mm  
588Nm

Powerful torque for super duty applications.

### SPECIFICATIONS

Capacities	
Standard bolt	M16-M22
High tensile bolt	M16-M20
Square drive	19mm
Impacts per minute	1,600
No load speed	1,700r/min
Max. Fastening torque	588Nm
Net weight	5kg
Power supply cord	2.5m



**TW1000** 25.4mm  
1000Nm

Robust high torque Impact wrench for heavy-duty application.

### SPECIFICATIONS

Capacities	
Standard bolt	M24-M30
High tensile bolt	M22-M24
Square drive	25.4mm
Impacts per minute	1,500
No load speed	1,400r/min
Net weight	8.4kg
Power supply cord	2.5m



# CORDLESS TOOLS

# With Ni-cd Cluster Battery

4.8V

**6723DW**  
In-line Cordless Screwdriver Kit  
4.5Nm

Convertible: pistol form or straight form

### SPECIFICATIONS

No Load Speed:	220 r/min
Max Fastening Torque	4.5Nm
Net Weight	0.42kg
Includes 80 piece accessory set	



9.6V

**DA392DW** 10mm  
Cordless Angle Drill

Perfect for use in confined areas

### SPECIFICATIONS

Capacities	
Steel	10mm
Wood	12mm
Wood Screws	4.5 x 20mm
No load speed	0 - 800r/min
Net weight	1.3kg

Includes 1 x 1.3Ah NiCd Battery & charger.



Ni-cd 1.3Ah  
DA392DW

12V

**6271DWAE** 10mm  
Cordless Drill/Driver  
30Nm

### SPECIFICATIONS

Capacities	
Steel	10mm
Wood	25mm
No load speed	Hi:0 - 1,300r/min Lo:0 - 400r/min
Maximum torque	Hard:30Nm Soft:18Nm
Net weight	1.5kg

Includes Driver Drill, 2 x 2.0 Ah NiCd Batteries & Charger



Ni-cd 2.0 Ah  
6271DWAE

12V

**4191DW** 80mm  
Cordless Diamond Cutter  
For fast and easy glass and ceramic tile cutting

### SPECIFICATIONS

Wheel diameter	80mm
Bore size	15mm
Max. Cutting capacity	
At 90°	21.5mm
At 45°	16mm
No load speed	1,000r/min
Net weight	2.1kg

Includes 1 x 2.0Ah NiCd Battery, Charger, Diamond Wheel & Hex Wrench.



14.4V

**8281DWALE** 10mm  
Cordless Percussion Driver Drill  
36Nm

Includes ML140 Torch  
SPECIFICATIONS

Capacities	
Steel	10mm
Wood	25mm
Masonry	10mm
Blows per minute	Hi : 0 - 19,500 Lo : 0 - 6,000
No load speed	Hi : 0 - 1,300r/min Lo : 0 - 400r/min
Net weight	1.7kg

Includes Driver Drill, 2 x 2.0Ah NiCd Batteries Charger & Rechargeable Torch



Ni-cd 2.0 Ah  
8281DWALE

# CORDLESS TOOLS

# With Ni-cd Cluster Battery

14.4V

**new**

## 8281DWPETC Cordless Percussion Driver Drill with Tool Kit


36Nm  
Includes 116 piece  
accessory set

### SPECIFICATIONS

Capacities	
Steel	10mm
Wood	25mm
Masonry	10mm
Blows per minute	Hi : 0 - 19,500 Lo : 0 - 6,000
No load speed	Hi : 0 - 1,300r/min Lo : 0 - 400r/min
Net weight	1.7kg
Includes Driver Drill, 2 x 1.3Ah NiCd Batteries Charger & 116 Piece Accessory Set	



Ni-cd 1.3 Ah  
8281DWPETC

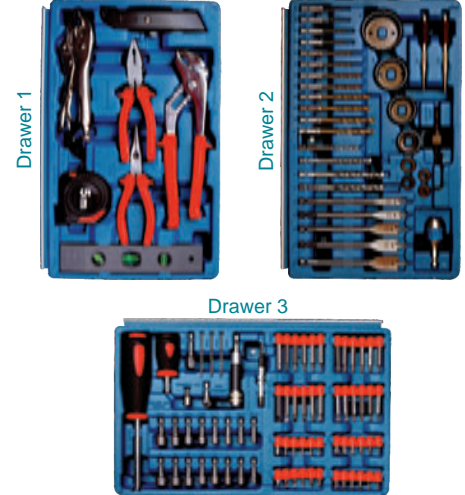

18V

## 8444DWAE 13mm Cordless Percussion Driver Drill

Variable 3-Speed  
80Nm

### SPECIFICATIONS

Capacities	
Steel	13mm
Wood	65mm
Masonry	16mm
Blows per minute	3rd: 0 - 25,500 2nd: 0 - 9,000 1st: 0 - 4,500
No load speed	3rd: 0 - 1,700r/min 2nd: 0 - 600r/min 1st: 0 - 300r/min
Maximum Torque	Hard: 80Nm Soft: 40Nm
Net weight	2.7kg
Includes Driver Drill, 2 x 2.0Ah NiCd Batteries & Charger.	



MXT  
CB430  
Ni-cd 2.0 Ah  
8444DWAE

# RECHARGEABLE TORCHES & SITE LIGHTS

BATTERY AND CHARGER SOLD SEPARATELY

12V

14.4V

12V

14.4V

18V

## ML122 Site Light

## ML142 Site Light



## ML120 Torches

## ML140

## ML180



**SPECIFICATIONS**  
Continuous Use  
(Capacity 2.0Ah)  
Net weight

ML122	ML142
150min	180min
0.9kg	1.15kg

**SPECIFICATIONS**  
Continuous Use  
(Capacity 2.0Ah)  
Net weight

ML120	ML140	ML180
160min	160min	180min
0.93kg	1.04kg	1.3kg



## DF330DWLE 10mm Cordless Driver Drill

24Nm  
Ideal for installation of Cupboards,  
Kitchens Units  
& Shopfitting

### SPECIFICATIONS

Capacities	
Steel	10mm
Wood	21mm
No load speed	
Hi	0 - 1,300 r/min
Lo	0 - 350 r/min
Max. Fastening torque	
Hard	24N.m
Soft	14N.m
Net weight	1.0kg



**new**



## BGA452ZK 115mm Cordless Angle Grinder

Powerful angle grinder  
now free from cord.



### SPECIFICATIONS

Max. Capacities (dia.)	
Depressed centre wheel	115mm
Abrasive disc	115mm
Diamond wheel	115mm
No load speed	10,000 r/min
Net weight	1.9kg

CB430

## BPB180ZK 120mm Cordless Band Saw

Lightweight and well balanced design.



### SPECIFICATIONS

Capacity	
Round Workpiece	120mm dia.
Square workpiece (without stand)	120x120mm
Blade Speed	1.4 - 2.7m/min
Net Weight	6.4kg

CB430

## BUC122ZK 115mm Cordless Chain Saw

High cutting speed  
with powerful motor.



### SPECIFICATIONS

Chain speed	300m/min
Cutting length	115mm
Chain Pitch	1/4"
Net weight	2.5kg

CB430

**16** \* Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.



# CORDLESS TOOLS

# LITHIUM-ION

## BSS610ZK 165mm Cordless Circular Saw

Lightweight and compact design



### SPECIFICATIONS

Blade diameter	165mm
Bore size	20mm
Max. Cutting capacity	
At 90°	0-57mm
At 45°	0-40mm
At 50°	0-36mm
No load speed	3,700r/min
Net weight	3.2kg



## BUB182Z Cordless Blower

High / Medium / Low Air volume settings.



### SPECIFICATIONS

Air volume	0 - 2.6m <sup>3</sup> /min
Air pressure	0 - 5.4kpa
No load speed	0-18,000 r/min
Net Weight	1.6kg



## BDA350ZK 10mm Cordless Angle Drill

Compact angle head with small head height.



### SPECIFICATIONS

Capacities	
Steel	10mm
Wood	25mm
No load speed	0-1,800r/min
Net weight	1.6kg




## BHP452ZK 13mm Cordless Impact Driver-Drill 50Nm

More power, less weight



### SPECIFICATIONS

Capacity	
Steel	13mm
Wood	38mm
Masonry	13mm
Impacts per minute	
Hi	0-22,500
Lo	0-6,000
No load speed	
Hi	0-1,500r/min
Lo	0-400r/min
Maximum torque	
Hard	50Nm
Soft	32Nm
Net weight	1.8kg



## BHP453RHEX 13mm Cordless Impact Driver-Drill Kit 42Nm

new

### SPECIFICATIONS

Capacity	
Steel	13mm
Wood	36mm
Masonry	13mm
Impacts per minute	
Hi	0-19,500
Lo	0-6,000
No load speed	
Hi	0-1,300r/min
Lo	0-400r/min
Maximum torque	
Hard	42Nm
Soft	27Nm
Net weight	1.7kg

Includes Driver Drill  
2 x 1.3Ah 18V Li-Ion Batteries  
Charger & 67 Piece Accessory Set



Supplied with  
2 x Light 1.3Ah 18V Li-Ion Batteries  
and compatible with  
3.0Ah 18V Li-Ion Batteries



## BHP454ZK 13mm Cordless Impact Driver Drill 80Nm

High power and durability



### SPECIFICATIONS

Capacity	
Steel	13mm
Wood	65mm
Masonry	16mm
Impacts per minute	
Hi	0-25,500
Lo	0-6,000
No load speed	
Hi	0-1,700 r/min
Lo	0-400 r/min
Maximum torque	
Hard	80Nm
Soft	40Nm
Net Weight	2.2kg




## BJV180ZK 26mm Cordless Jig Saw

High accuracy and efficiency



### SPECIFICATIONS

Length of stroke	26mm
Max cutting capacities	
In steel at 90°	10mm
In wood at 90°	135mm
In aluminium at 90°	20mm
Strokes per minute	0 - 2,600
Net weight	2.8kg



## BTP140Z Cordless 4-Mode Impact Driver 140Nm

4 Operation modes for ultimate versatility.

Optional chuck required for normal straight shanks bit.

### SPECIFICATIONS

Capacities	
Steel	10mm
Wood	21mm
Masonry	8mm
No load speed	
Impact-driver mode	0-2,300r/min
Drill mode (Hi-Lo)	0-2,300/0-700r/min
Screwdriver mode	0-2,300 r/min
Impacts per min	
Impact-driver mode	0-3,200
Percussion-drill Mode	0-27,600
Maximum Fastening Torque	
Impact-driver mode	140Nm
Drill Mode	10Nm
Net Weight	1.8kg



## BJR181ZK 28mm Cordless Recipro Saw

Extra high cutting speed



### SPECIFICATIONS

Length of stroke	28mm
Max cutting capacities	
In pipe	130mm
In wood	255mm
Strokes per minute	0-2,900
Net weight	3.7kg



## BTD140ZK 6.35mm Cordless Impact Driver 145Nm

Very compact body with overall length of only 146mm.

### SPECIFICATIONS

Capacities	
Machine screw	M4-M8
Standard bolt	M5-M14
High tensile bolt	M5-M12
Coarse thread (length)	22mm-125mm
No load speed	0-2,300r/min
Impacts per minute	0-3,200
Maximum fastening torque	145Nm
Net weight	1.5kg



\* Unless otherwise indicated, although 18V Li-Ion are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

# CORDLESS TOOLS

**LITHIUM-ION**

## BTW251ZK 12.7mm Cordless Impact Wrench 230Nm



High torque to weight ratio

### SPECIFICATIONS

Capacities	
Standard bolt	M10-M16
High tensile bolt	M10-M14
Impacts per minute	0 - 3,200bpm
No Load speed	0 - 2,100r/min
Maximum fastening torque	230Nm
Net weight	1.7kg



## BTW450ZK 12.7mm Cordless Impact Wrench 440Nm



Same fastening torque in forward and reverse rotation

### SPECIFICATIONS

Capacity	
Square drive	12.7mm
Impacts per minute	2,200bpm
No load speed	1,600 r/min
Max. fastening torque	440Nm
Net Weight	3.4kg



## BJS130ZK 1.3mm Cordless Metal Shear



360° Swivel shear head for increased cutting convenience

### SPECIFICATIONS

Capacity	
Mild Steel up to 400 N/mm <sup>2</sup>	1.3mm
Stainless Steel up to 600 N/mm <sup>2</sup>	1.0mm
No load speed	2,800r/min
Net weight	2.3kg



## BHR202ZK 20mm SDS+ Cordless Rotary Hammer



Light Weight with 3 operation modes

### SPECIFICATIONS

Capacities	
Concrete	20mm
Steel	13mm
Wood	26mm
No load speed	0-1,100r/min
Blows per minute	0-4,000
Net weight	3.2kg



## BFS450ZK Cordless Drywall Screwdriver

Easy bit changes with one-touch locator



### SPECIFICATIONS

Capacities	
Drywall screw	4mm
Driving Shank (hex)	6.35mm hex
Net weight	1.9kg



## BFR550Z Cordless Autofeed Screwdriver

Reliable sturdy aluminium casing attachment.



### SPECIFICATIONS

Capacities	
Drywall screw	4x22-55mm
Bit size	6.35mm hex
No load speed	4,000r/min
Net weight	2.3kg



\* Although Rotary Hammer is portrayed with a bit it is sold without bits.

\* Although autofeed screwdriver is portrayed with autofeed screws it is sold without screws.

## BVC350Z Vacuum Cleaner



Convenient for use with Makita Cordless Tools



new

### SPECIFICATIONS

Max. peak air flow	3.4m <sup>3</sup> /min
Max. sealed suction	5.5kpa
Recoverable Capacity	Dust: 3.0L
Net Weight	2.2kg



## BML184 Job Site Light

Fluorescent light provided with flashlight



### SPECIFICATIONS

Current	0.6A
Continuous use	
Fluorescent light	200min (3.0Ah)
Flash Light	900min (3.0Ah)
Net weight (without battery)	0.4kg

## BML185 Rechargeable Flashlight

Ergonomically designed rubberised soft grip



### SPECIFICATIONS

Current	0.6A
Continuous use	260min (3.0Ah)
Net weight (without battery)	0.36kg

## BCL180Z Cordless Cleaner

Optimum cleaner for a variety of applications

new



### SPECIFICATIONS

Capacity	650mL
Continuous use	20 min
Max. air flow	1.3m <sup>3</sup> /min
Max. sealed suction	3.6kpa
Net Weight	1.2kg

## BMR100 Job Site Radio

MP3 input

### SPECIFICATIONS

Practical Max. output	
9.6V: 0.8Wx2	
12V: 1.2Wx2	
14V: 2Wx2	
18V: 3Wx2	
Frequency band range	
AM: 522 - 1692kHz	
FM: 87.5-108MHz	

Works with all 12 - 18V Makita batteries



18

\* Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

# CORDLESS TOOLS



## BBY180Z Motor Assisted Bicycle



Travel further with motor-assisted mode

Compact, foldable frame design for easy transportation & storage



## BATTERIES

### BL1830 3.0Ah Rechargeable Battery

Compatible with ALL Makita 18V Li-Ion Tools



### BL1815 1.3Ah Rechargeable Battery

Compatible with the following

**Makita 18V Li-Ion Tools:**  
BBY180, BCL180, BFR550, BFS450, BHP452, BHP453, BJS130, BML184, BML185, BMR100, BTP140, BTW251, BUB182, BVC350.



## CHARGERS

### DC18RA Fast Charger



#### SPECIFICATIONS

Recharging Times  
3.0Ah 22 minutes  
1.3Ah / 1.5Ah 15 minutes

### DC18SE Automotive Charger



#### SPECIFICATIONS

Recharging Times  
3.0Ah 60 minutes  
1.3Ah / 1.5Ah 30 minutes

## Optimum Charging System



### 22<sub>min</sub> Fast Charging with Cooling fan


The charging time in practical condition  
In case that the battery that became 70 degrees C right after use is charged in the environment of 25 degrees C.



Total 34 min



Total 70 min

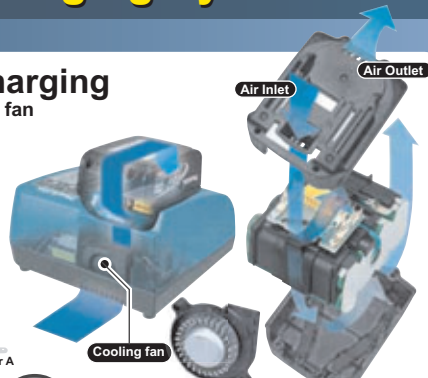


It is necessary to cool down the battery before you begin to charge it when you charge the battery, which is the high temperature after use. MAKITA developed the original charger system; Built-in the cooling fan. The stand-by time until the charge starts is greatly shortened by cooling efficiently. In addition, the charger keeps cooling while charging it, and the rapid charge is achieved.

#### Well Balanced Cooling

The design which air flows efficiently overall and it can cool cell evenly and rapidly. Well-balanced cooling system prevents the load only to a part of cell and makes battery life longer.



MAKITA's Optimum Air flow



### 430% Extreme Stamina Life time work volume


The charger communicates with the individual cell in battery and then it controls current, voltage, and temperature. The both rapid and optimum charge was achieved. It made battery life longer.

#### Total Power Delivery Amount of each battery's service lifetime



#### Built-in Memory Chip

The built-in memory chip in battery records the battery usage history and transmits it to the charger.



#### Built-in CPU


The CPU built in the charger analyzes its condition; high temperature, re-charge after full charged, over-discharging. The battery lasts long life because it can be charged at the best method and time.

#### Well Balanced Charging


MAKITA: Capacity Balanced Battery Pack

1. It is designed that an individual cell whose condition is full, discharge, empty works well. It is hard to become the over-discharge and an overcharge because the individual cell capacity prevent to anomalies.

2. It is possible to use it efficiently because the capacity of each cell is not uneven and discharge evenly.



### 40% Lighter



#### Firm Holding

Multi-contact terminals reduce electrical resistance and increase connection stability withstanding against vibration, and ultimately ensures stable current supply to the tool.



#### Anytime Charge

No Memory Effect  
No discharging required



#### Shock Absorbing

Heavy Duty Pack



#### Longtime Storage

Low Self Discharge



#### Batteries and Chargers for Optimum Charging System



\* Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

# CORDLESS TOOLS

**LITHIUM-ION**

## Fast Charging System

**36V**  
Lithium Ion

2.6Ah

BL3626  
(194873-2)



Charging time  
**22 min.**



DC36RA  
for BL3626 only

### BUB360Z Cordless Blower

High power and environmentally friendly



#### SPECIFICATIONS

Air volume	Hi: 4.4m <sup>3</sup> /min Lo: 2.6m <sup>3</sup> /min
Air speed	Hi: 93m/s Lo: 57m/s
No load speed	Hi: 17,000 r/min Lo: 10,000 r/min
Net Weight	3.1kg



### BHR261RDE 26mm SDS+ Cordless Rotary Hammer

3 Operation Modes  
Outstanding performance from 36V Li-Ion battery



#### SPECIFICATIONS

Capacities	
Concrete	26mm
Steel	13mm
Wood	32mm
No load speed	0-1,200r/min
Blows per minute	0-4,800
Net weight	4.5kg

Includes Rotary Hammer,  
2 x 2.6Ah 36V Li-Ion Batteries  
& Charger



### BML360 Rechargeable Fluorescent Light

Wide and bright illumination provided by 27W flat double twin-tube compact fluorescent lamp.



#### SPECIFICATIONS

Continuous use	210min (2.6Ah)
Net weight (without battery)	2.3kg



\* Unless otherwise indicated, although 36V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

**maktec**  
by *Makita*

## SIMPLE SOLID POWER

### Angle Grinders

#### MT962 115mm

High performance and durability



#### SPECIFICATIONS

Max. Capacities (dia.)	
Depressed centre wheel	115mm
Abrasive disc	115mm
Diamond wheel	115mm
No load speed	11,000 r/min
Net weight	2.0kg
Power supply cord	2.0m



#### MT957 125mm

Conveniently located slide switch



#### SPECIFICATIONS

Max. Capacities (dia.)	
Depressed centre wheel	125mm
Abrasive disc	125mm
Diamond wheel	125mm
No load speed	11,000 r/min
Net weight	1.5kg
Power supply cord	2.0m



#### MT901 230mm

Industrial performance and durability



#### SPECIFICATIONS

Max. Capacities (dia.)	
Depressed centre wheel	230mm
Abrasive disc	230mm
Diamond wheel	230mm
No load speed	6,600 r/min
Net weight	4.7kg
Power supply cord	2.0m



\* Although Angle Grinders are portrayed with a grinding disc, MT962, 180mm & 230mm Angle Grinders are sold without grinding discs.

### Belt Sander

#### MT940 100mm

Design allows for flush sanding to walls



#### SPECIFICATIONS

Belt size	100 x 610mm
Belt speed	380m/min
Net weight	6.3kg
Power supply cord	2.0m



### Blower

#### MT400

In-line ergonomically designed grip



#### SPECIFICATIONS

Air volume	1.3 - 2.4m <sup>3</sup> /min
No load speed	8,500 - 16,000 r/min
Net Weight	1.3kg
Power Supply Cord	2.0m



### Circular Saw

#### MT582 190mm

Powerful cutting, efficient control



#### SPECIFICATIONS

Blade diameter	190mm
Bore size	30mm
Max. Cutting capacity	
At 90°	68mm
At 45°	46mm
No load speed	4,900r/min
Net weight	4.0kg
Power supply cord	2.0m



## Cordless Driver Drills

### MT063SK2 10mm

Compact and well balanced

#### SPECIFICATIONS

Capacity	
Steel	10mm
Wood	24mm
Wood screw	5.1 x 63mm
No load speed	Hi : 0-1,000r/min
	Lo : 0-350r/min
Maximum torque	Hard : 21Nm
	Soft : 14Nm
Net weight	1.4kg

Includes Driver Drill  
Charger & 2 x 1.3Ah Ni-cd batteries



### MT064SK2 10mm

Soft grip handle pad provides non-slip surface

#### SPECIFICATIONS

Capacity	
Steel	10mm
Wood	25mm
Wood screw	6.0 x 75mm
No load speed	Hi : 0-1,300r/min
	Lo : 0-400r/min
Maximum torque	Hard : 28Nm
	Soft : 15Nm
Net weight	2.0kg

Includes Driver Drill  
Charger & 2 x 1.3Ah Ni-cd batteries



## Cut-Off & Mitre Saws

### MT240 355mm

Powerful cutting performance

#### SPECIFICATIONS

Blade diameter	355mm
Bore size	25.4mm
No load speed	3,800r/min
Net weight	15.9kg
Power supply cord	2.5m




### MT230 255mm

Economical and durable

#### SPECIFICATIONS

Blade diameter	255mm
Max. Cutting capacity with 255mm blade	
At 90°	75mm x 130mm
At 45°	75mm x 90mm
No load speed	4,200 r/min
Net weight	14.7kg
Power supply cord	2.5m
Carbon brush	JM2300012



## Impact Drills

### MT811 13mm

Compact and lightweight

#### SPECIFICATIONS

Drilling capacities	
Concrete	13mm
Steel	13mm
Wood	18mm
No load speed	0 - 2,800r/min
Blows per minute	0 - 30,800
Net weight	1.6kg
Power supply cord	2m



### MT813 13mm

Compact, lightweight and powerful

#### SPECIFICATIONS

Drilling capacities	
Concrete	16mm
Steel	13mm
Wood	30mm
No load speed	0 - 3,000r/min
Blows per minute	0 - 45,000
Net weight	2.0kg
Power supply cord	2m



## Jig Saws

### MT431 18mm

Powerful and lightweight

#### SPECIFICATIONS

Capacity	
In wood at 0 degrees :	65mm
In steel at 0 degrees :	6mm
Length of stroke	18mm
Strokes per minute (spm)	0-3,100
Net weight	1.9kg
Power supply cord	2.0m



### MT430 26mm

Rigid cylindrical housing

#### SPECIFICATIONS

Capacity	
In wood at 0 degrees :	55mm
In steel at 0 degrees :	6mm
Length of stroke	26mm
Strokes per minute (spm)	0-3,100
Net weight	2.6kg
Power supply cord	2.0m



Orbital Sanders

**MT920** 1/4 Sheet

Extremely versatile sander



**SPECIFICATIONS**  
Pad size 112mm x 102mm  
Abrasive paper size 114mm x 140mm  
Orbits per minute 14,000  
Net weight 0.9kg  
Power supply cord 2.0m



**MT921** 1/3 Sheet

Comfortable and lightweight



**SPECIFICATIONS**  
Pad size 93mm x 185mm  
Abrasive paper size 93mm x 228mm  
Orbits per minute 12,000  
Net weight 1.3kg  
Power supply cord 2.0m



**MT922** 125mm

Industrial performance



**SPECIFICATIONS**  
Pad diameter 123mm  
Abrasive disc diameter 125mm  
Orbits per minute 12,000  
Net weight 1.3kg  
Power supply cord 2.0m



Planers

**MT190** 82mm

More power output for increased performance

Reversible mini TCT blades.



**SPECIFICATIONS**  
Planing width 82mm  
Max Planing depth 1mm  
No load speed 16,000r/min  
Net weight 2.5kg  
Power supply cord 2.0m




**MT110** 82mm Long Base

Reliable performance from lightweight body

Reversible mini TCT blades.



**SPECIFICATIONS**  
Planing width 82mm  
Max Planing depth 3mm  
No load speed 18,000r/min  
Net weight 4.7kg  
Power supply cord 2.0m



Rotary Drills

**MT651** 6.5mm High Speed

Economic and durable



**SPECIFICATIONS**  
Drilling capacity  
Steel 6.5mm  
Wood 9mm  
No load speed 0 - 4,500r/min  
Net weight 0.9kg  
Power supply cord 2.0m



**MT600** 10mm Geared Chuck

Compact and lightweight



**SPECIFICATIONS**  
Drilling capacity  
Steel 10mm  
Wood 25mm  
No load speed 0 - 2,500r/min  
Net weight 1.4kg  
Power supply cord 2.0m



**MT601** 10mm Keyless Chuck

Compact, lightweight and powerful



**SPECIFICATIONS**  
Drilling capacity  
Steel 10mm  
Wood 25mm  
No load speed 0 - 2,500r/min  
Net weight 1.4kg  
Power supply cord 2.0m



Router

**MT360** 12.7mm

Heavy-duty routing with powerful motor



**SPECIFICATIONS**  
Collet capacity 12.7mm  
Plunge capacity 0 - 60mm  
No load speed 22,000r/min  
Net weight 5.5kg  
Power supply cord 2.0m



# OUTDOOR POWER EQUIPMENT


## DCS4610 400mm 45ml **new** Petrol Chain Saw

Hobby class chain saw with more power for home and garden



### SPECIFICATIONS

Standard guide bar	400mm
Chain Blade	Pitch: 3/8" Gauge: 0.058"
Displacement	45.1ml
Engine power	1.7kW / 2.3PS
Fuel tank	0.37L
Chain oil tank	0.25L
Power head weight	4.75kg



## UC4020A 400mm Electric Chain Saw

Hobby class, easy operation and maintenance



### SPECIFICATIONS

Chain Speed per minute	800m
Guide bar length	400mm
Chain Blade	Pitch: 3/8" Gauge: 0.043 / 0.058"
Net Weight:	3.8kg
Power supply cord	0.3m



## UC4030A 400mm Electric Chain Saw

Pro class, excellent in heavy duty application



### SPECIFICATIONS

Chain Speed per minute	800m
Guide bar length	400mm
Chain Blade	Pitch: 3/8" Gauge: 0.050"
Chain oil tank	0.14L
Net weight	4.4kg
Power supply cord	0.3m



## RBC2110 21ml **new** Petrol Brush Cutter

Lightweight and handy string trimmer for do-it-yourselfers.



### SPECIFICATIONS

Displacement	21ml
Engine power	0.62kW / 0.84PS
Fuel mixture	25:1
Fuel tank	0.4L
Spindle size	M8 x 1.25LH
Net weight	3.6kg



## RBC420 40.2ml **new** Petrol Brush Cutter

Durable performance for professional landscaping



Blade not standard  
Supplied with ultra auto 6 line head

### SPECIFICATIONS

Displacement	40.2ml
Engine power	1.42kW / 2.0PS
Fuel mixture	25:1
Fuel tank	0.83L
Spindle size	M10 x 1.0LH
Net weight	7.9kg



## UM4030 **new** Electric String Trimmer

Quiet and powerful



### SPECIFICATIONS

Cutting diameter	400mm
2-wire head Tap & Go	
Handle	D-type
Net Weight	4.9kg



## UH6570 650mm **new** Electric Hedge Trimmer

Comfortable operation by ergonomically designed rubberized soft grip



### SPECIFICATIONS

Cutting diameter	650mm
Strokes per minute	1,600
Net Weight	3.7kg
Power supply cord	0.3m



## HW102 360 litre/hour **new** Pressure Washer

Lightweight and compact power washer for home use.



### SPECIFICATIONS

Max pressure	100 bar
Max flow	360 l/h
Max water temperature (intake)	50 °C
Mechanical system	Wobble plate
Weight	5,8 kg



# OUTDOOR POWER EQUIPMENT

**DPC7331** 350mm  
Power Cutter

**new**

Iconic power cutter with  
one-touch filter replacement



## SPECIFICATIONS

Wheel diameter 350mm  
Engine 73ml  
Max. cutting depth 122mm  
Circumferential speed 80m/s  
Engine power 4.2kW  
Fuel mixture 50:1  
Fuel tank 1.1L  
Net Weight 10.0kg



73cc

**DPC7331**  
Power Cutter  
can be supplied with optional guide trolley  
957394355/6



**AVT** Anti Vibration Technology

**DXT** Deep and Exact Cutting Technology

**LXT** Lithium Extreme Technology

**MXT** Metal Extreme Technology

**SJS** Super Joint System

Anti Vibration

Automatic Oiling

Brake

Bevel Cutting

Bevel Cutting L45 R5

Bevel Cutting 45 LR

Built-in Light



Carrying Case



Chain Brake



Constant Speed



Decompression Valve



Depth Adjusting



Double Insulation



Dust Collecting



Electronic Ignition



Electronic 2-Speed



Electronic speed control



Hex Shank



Hook & Loop



Jig Saw Blade - Bayonet shank



Keyless Chuck



Jig Saw Blade - Makita shank



Laser Marker



Mechanical 2-Speed



Mechanical 3-Speed



Orbital Cutting



Primer Pump



Rapid Start



Reversing



SDS-plus



SDS-max



Single / Sequential Firing



Soft Start



Stepless Torque Setting



Torque Setting



Torque Limiter



Variable Speed

DEALER STAMP

[www.makita.co.za](http://www.makita.co.za)

**Rutherford**

A member of the **Hudaco** Group

FOR WHOLESALE TRADE ENQUIRIES ONLY

**CAPE TOWN**  
Tel : (021) 932-0568  
Fax : (021) 932-2762

**DURBAN**  
Tel : (031) 717-6400  
Fax : (031) 709-1928

**JOHANNESBURG**  
Tel : (011) 878-2600  
Fax : (011) 873-5010

[www.maktec.co.za](http://www.maktec.co.za)

**GUARANTEE:** These machines have been thoroughly inspected and tested before leaving the factory and are guaranteed against defective workmanship and materials. Should any problems develop the complete machine must be returned to an Authorised Makita Service Centre. This guarantee does not apply where repairs have been made or attempted to be made to the machine by unauthorized persons and/or as a result of normal wear and tear, and/or if the machine has been abused or used for any purpose other than its intended specified use having regard to the capacity thereof. Nothing contained in this guarantee shall deprive the manufacturer and/or supplier on the one hand, and the consumer or customer on the other hand, of any rights or obligations they may have under and in terms of the Consumer Protection Act 68 of 2008 and any Regulations and amendments pertaining thereto from time to time ("the Act"), insofar as the Act may be applicable to the manufacture, sale and/or supply and purchase of the machine.

Please note: Manufacturer reserves the right to change specifications of parts and accessories without notice. Standard equipment and specifications of parts may vary in accordance with specifications issued by various countries."

This catalogue replaces the Makita Power Tool Catalogue dated May 2010 and all previous Makita Power Tool Catalogues.  
Rutherford is not responsible for printing errors (E&OE)

Theta Graphics and Print Tel: (011) 608-2880